


# LED Downlight

## LED Downlight Recessed Square

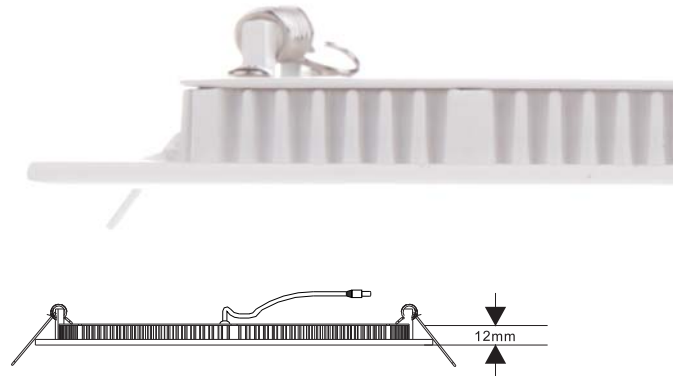

### LED Downlight

Product Name	Wattage (W)	CCT	Beam angle	Output	Lumens	Lifetime (Hrs)	Dimension
5LDRS003	3	3000K, 6000K	110	220-240V	180	35,000	85 x 12 mm. (2.5")
5LDRS004	4	3000K, 6000K	110	220-240V	250	35,000	110 x 12 mm. (3")
5LDRS006	6	3000K, 6000K	110	220-240V	345	35,000	120 x 12 mm. (4")
5LDRS009	9	3000K, 6000K	110	220-240V	540	35,000	150 x 12 mm. (5")
5LDRS012	12	3000K, 6000K	110	220-240V	870	35,000	170 x 12 mm. (6")
5LDRS015	15	3000K, 6000K	110	220-240V	1120	35,000	192 x 12 mm. (7")
5LDRS018	15	3000K, 6000K	110	220-240V	1430	35,000	224 x 12 mm. (8")